





FKWJ-0.6 Underground Diesel Loader



Main Features

- Main parts are imported top brand, like Deutz Engine, Sauer PV pumps and motors, Parker pump and valves etc.
- Brake system is equipped with Forceps disc, hydraulic release and spring brake supply better braking performance, Central articulated full hydraulic steering
- Tailor made size and optional parts for customers to choose: remote control ejector bucket etc.

General Dimension

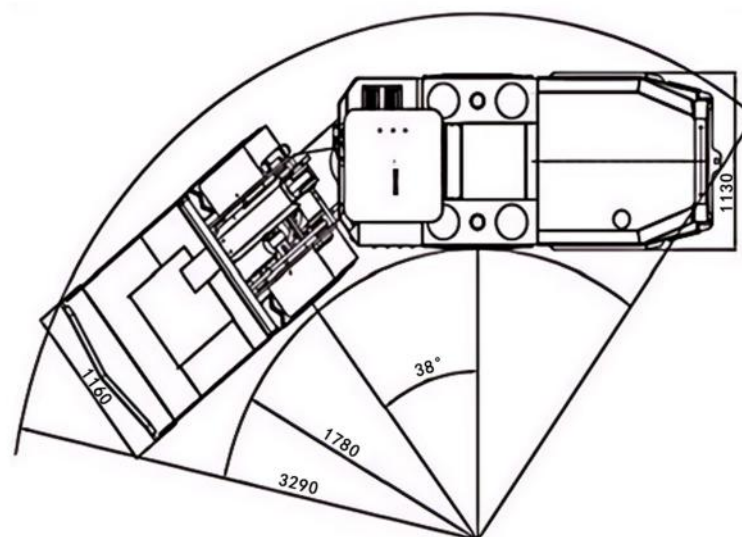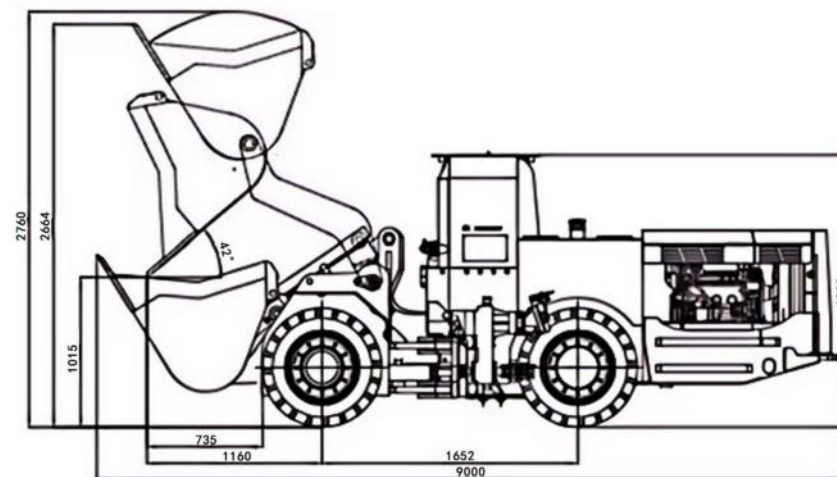

FKWJ-0.6 Underground Diesel Loader



Technical Parameter

General Parameter		Loader Weight & Capacity	
Rated capacity	1200 kg	Scooptram weight	5500 kg
Length(bucket down)	5000 mm	Load weight	6700 kg
Length(bucket up)	4780 mm	Traveling Performance	
Width(bucket)	1300 mm	Forward/backward	0-9.8 km/h
Width(frame)	1300 mm	Grade ability	25%
Height(cabin)	1900 mm	Max. Traction	40 KN
Bucket volume	0.6 m ³	Max. Shovel	42 KN
Discharging height	910 mm	Tyre size	7.5-15
Min. Ground clearance	145 mm	Tyre pressure	0.6-0.7 MPa
Departure angle	15°	Diesel Engine	
Steering angle	left/right 38°	Brand	Germany DEUTZ
Rear axle swing	6.5°	Model	D914L04
Min. Turning radius	inner 1780 mm	Type	Air cooling, Tier III, Stage 3A
Min. Turning radius	Outer 3430 mm	Rated Power	58KW/2300rpm
Hydraulic Pump		Bucket	
Brand	REXROTH	Material	Manganese steel
Model	A4VG56	Ejector Bucket	For optional
Type	Fully reversible variable piston pump	Control system	
Hydraulic motor		Manual control	YES
Brand	DANFOSS	Remotor control	For optional
Model	90M075	Fire system	
Type	Imported Variable piston motor	Manual Fire extinguisher	YES
Lubrication system		Centralized Fire extinguisher	For optional
Manual lubrication	YES		
Centralized lubrication	For optional		